


Symposium

Symmetry of STRUCTURE

an interdisciplinary Symposium

Abstracts

I.

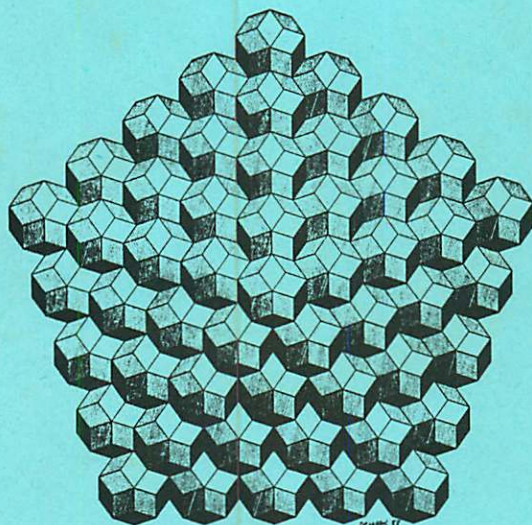

Edited by Gy. Darvas and D. Nagy

*Buda
pest*

August 13-19, 1989

hungary

THE PECULIAR STABILITY BEHAVIOUR OF NON-SYMMETRICALLY
LOADED SYMMETRICAL STRUCTURES

by István Hegedűs and László P. Kollár
Technical University of Budapest

Let us consider the simple symmetrical plane structure shown in Fig. 1a which consists of rigid bars and elastic springs, connected by hinges. The degree of freedom of movements is

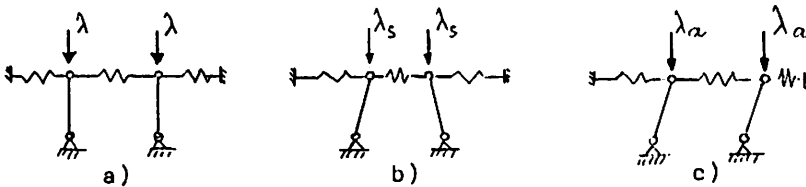


Fig.1

two. The symmetrical load can cause symmetrical (Fig. 1b) or antisymmetrical (Fig. 1c) buckling. The critical loads which belong to these buckling modes are denoted by λ_s and λ_a respectively.




Fig. 2

Assuming different loads acting on the left and right bar (Fig.2), it can be shown that the critical loads (λ_{cr}) are the roots of the following equation of the second degree:

$$\lambda_{cr}^2 (P_s^2 - P_a^2) - \lambda_{cr} P_s (\lambda_s + \lambda_a) + \lambda_s \lambda_a = 0 . \quad (1)$$

Consequently, in the case of special non-symmetrical load arrangements shown in Fig.3, the critical load can be calculated from the geometric, arithmetic and harmonic means

of λ_s and λ_a . By investigating some similar structures we have obtained the same result, namely that the critical load

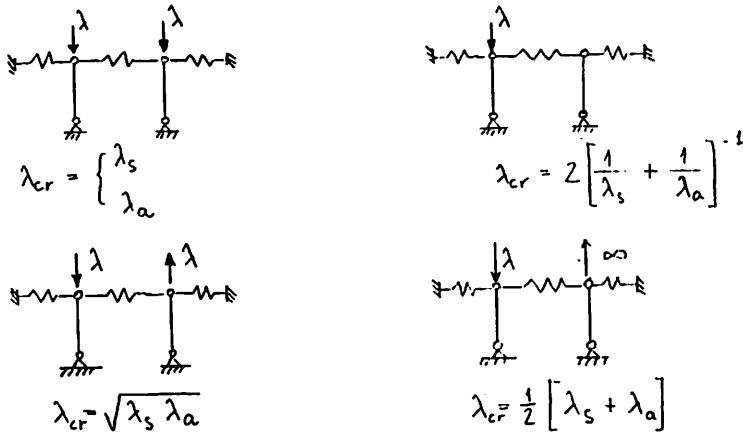


Fig.3

of a non-symmetrically loaded symmetrical structure can be obtained from the critical loads belonging to the symmetrical and antisymmetrical buckling modes of the symmetrically loaded structure on the basis of (1). Now the question arises whether this strange behaviour is a general feature of "symmetric" eigenvalue problems. The answer is no, but we can give the conditions with the aid of which it can be decided when this behaviour occurs.

Let us introduce the following bilinear functional:

$$\begin{aligned} \Pi = & \frac{1}{2} \langle A_1 \psi_s, A_2 \psi_s \rangle + \frac{1}{2} \langle B_1 \varphi_a, B_2 \varphi_a \rangle + \frac{1}{2} \langle D_1 \hat{\psi}_s, D_2 \hat{\psi}_s \rangle + \frac{1}{2} \langle E_1 \hat{\varphi}_a, E_2 \hat{\varphi}_a \rangle + \frac{1}{2} \langle F_1 \hat{\psi}_s, F_2 \psi_s \rangle + \\ & + \frac{1}{2} \langle G_1 \hat{\varphi}_a, G_2 \varphi_a \rangle - \frac{1}{2} \lambda \left\{ P_S \left[\langle C_1 \psi_s, C_2 \psi_s \rangle + \langle C_1 \varphi_a, C_2 \varphi_a \rangle \right] + 2 P_a \langle C_1 \psi_s, C_2 \varphi_a \rangle \right\} \end{aligned}$$

where ψ_s , φ_a , $\hat{\psi}_s$, $\hat{\varphi}_a$ are the elements of the real inner product (pre-Hilbert) space $\tilde{\mathcal{H}}$, which form the vector:

$$\underline{\psi} = \begin{bmatrix} \psi_s \\ \hat{\psi}_s \\ \varphi_a \\ \hat{\varphi}_a \end{bmatrix}$$

and $A_1, B_1, \dots, A_2, B_2$ etc. are linear operators of \mathcal{H} . We deal with the

$$\Pi = \text{stationary} \quad !$$

eigenvalue problem. Assuming symmetrical loading, i.e. $P_s = 1$ and $P_a = 0$, we obtain the eigenvalue parameters λ_s and λ_a which belong to the eigenfunctions

$$\phi_s = \begin{bmatrix} \phi_s \\ \hat{\phi}_s \\ 0 \\ 0 \end{bmatrix} \quad \phi_a = \begin{bmatrix} 0 \\ 0 \\ \phi_a \\ \hat{\phi}_a \end{bmatrix}$$

respectively. In the case of non-symmetrical load, the critical load can be calculated on the basis of (1) only if

$$C_1^* C_2 \phi_s = \alpha C_1^* C_2 \phi_a, \quad ,$$

where α is a scalar, and C_1^* is the adjoint operator of C_1 , see [Hegedűs and Kollár, 1989a].

The results can be used for the investigation of discrete and continuous problems as well, among others for the flexural wrinkling of sandwich panels [Hegedűs and Kollár, 1989a,b].

REFERENCES

- 1 Hegedűs, I. and Kollár, L. P. (1989a): Buckling of Symmetrical Structures Under Non-symmetrical Loads. (It is sent to the Journal of Structural Mechanics.)
- 2 Hegedűs, I. and Kollár, L. P. (1989b): Wrinkling of Faces of Sandwiches and its Interaction with Overall Instability. Acta Techn. Hung. (At press)